

# WebOP-3070T

7" WVGA Cortex™ - A8  
Operator Panel with  
Wide Operating Temperature Range

NEW



## Features

- RISC 32 bits TI ARM® Cortex™-A8 processor
- Various LCD sizes (7", 8", 10.1", 12", 15")
- Full line LED BL TFT LCD with 50K life time
- Embedded Microsoft® WinCE 6.0 OS
- Supports WebOP Designer HMI Runtime development tool
- Backup Memory FRAM in 128KB(64 words) without battery concern
- Power & Terminal I/O ports isolation protection
- -20°C ~ 60°C wide operating temperature range
- Support CANopen library registered by CiA 301 V4.02
- RS-422/RS-485/CAN terminal I/O ports support Termination Resistor 120Ω
- Front panel IP66 compliant
- Die-cast aluminum alloy front bezel

## Introduction

With brand-new ID design, the WebOP-3070T provides stringent standards required in the automation market. Advantech offers the WebOP-3070T with Cortex™-A8 processor which consumes minimum power without sacrificing performance. The WebOP-3070T supports a variety of LCD sizes from 4.3" to 15" for different applications involving the use of PLCs, motion/thermal controllers, inverters and sensors. It's also provided with a wide operating temperature range to fulfill the requirements of harsh environments. The built-in Microsoft® WinCE 6.0 OS platform which bundles WebOP Designer lets the WebOP-3070T becomes a control HMI solution for flexible system integration.

## Specifications

### General

- **Certification** CE, BSMI, CCC, UL, FCC Class A
- **Dimensions (WxHxD)** 203.4 x 150 x 43.7 mm (8.01" x 5.91" x 1.72")
- **Cut-out Dimensions** 192 x 138.5 mm (7.56" x 5.45")
- **OS Support** Microsoft® Windows CE 6.0
- **Power Input** 24V<sub>DC</sub> ±10%
- **Power Consumption** 7W (Typical)
- **Enclosure Housing** PC + ABS
- **Mounting** Panel
- **Weight (Net)** 1 Kg (2.20 lbs)

### System Hardware

- **CPU** RISC 32 bits, 600 MHz (ARM® Cortex™-A8)
- **Backup Memory** FRAM 128KB
- **Flash Memory** DDR2 256MB on board
- **Storage** 512MB on board SLC type
- **Power-On LED** Yes

### Communication Interface

- **COM1** RS-232/422/485 (DB9 Male)
- **COM2** RS-422/485 (Terminal Plug 4-Pin)
- **COM3** RS-485 (Terminal Plug 2-Pin)
- **CAN** Terminal Plug 2-Pin
- **Ethernet (RJ45)** 10/100-BaseT
- **I/Os**

USB Client	USB 2.0 Client x 1
USB Host	USB 2.0 Host x 1
Micro-SD Slot	Yes
Audio	1 Line-out / 1 Mic-in

### LCD Display

- **Display Type** WVGA TFT LCD
- **Display Size** 7"
- **Max. Resolution** 800 x 480
- **Max. Colors** 64K
- **Luminance (cd/m²)** 500
- **Viewing Angle (H/V)** 140/120
- **Backlight Life** LED, 50,000 hrs
- **Dimming** Adjustable by touch panel
- **Contrast Ratio** 700:1

### Touchscreen

- **Lifespan** 36 million touches at 8mm-diameter finger point through silicone rubber bearing at least 250g 2 times per second.
- **Light** Transmission Above 80%
- **Resolution** Linearity
- **Type** 5-wire, analog resistive

### Environment

- **Operating Temperature** -20 ~ 60°C (-4 ~ 140°F)
- **Storage Temperature** -30 ~ 70°C (-22 ~ 158°F)
- **Humidity** 10 ~ 90% RH @ 40°C, non-condensing
- **Ingress Protection** Front panel: IP66
- **Vibration Protection** Operating, random vibration 1 Grms (5 ~ 500 Hz)



FRANCE

+33 2 51 09 26 60  
sales@sphinxfrance.fr


SPAIN

+34 2 933 396 542  
comercial@s-connect.es

WebOP-3070T

## Dimensions

Unit: mm

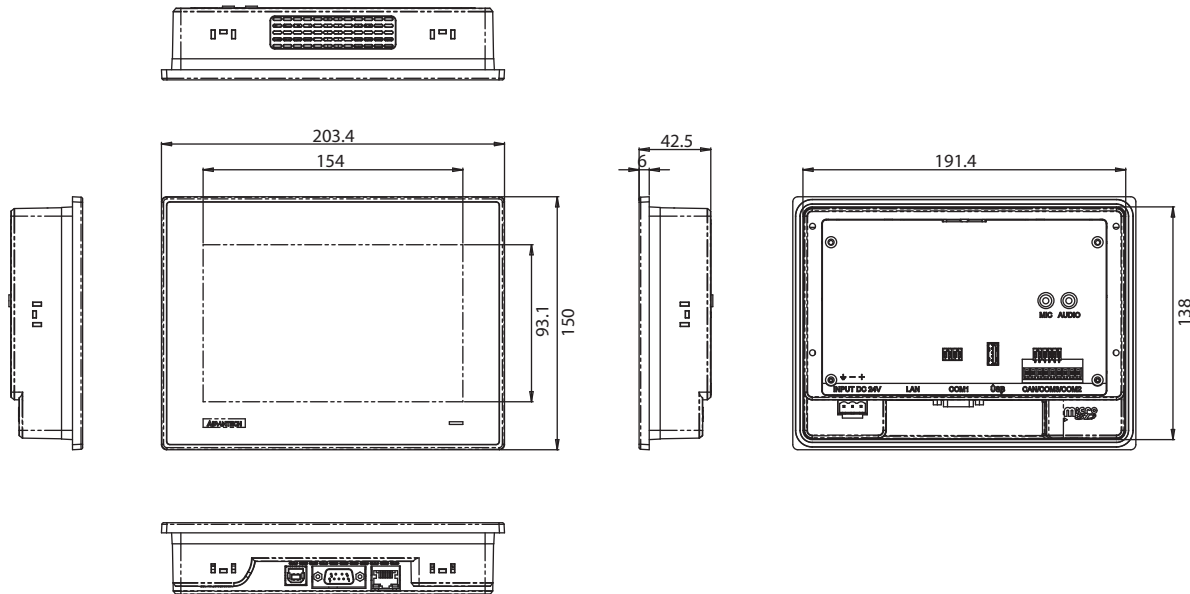

Panel Cut Out Dimensions: 192 x 138.5 mm (7.56" x 5.45")


## Ordering Information

- WOP-3070T-C4AE 7" WVGA, Cortex™-A8, 256MB DDR, WinCE 6.0


## Accessories

- PWR-247-AE 24 V 50 W AC-DC Power Adapter
- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 1702031836 Power Cable China/Australia Plug 1.8 M

## Base View

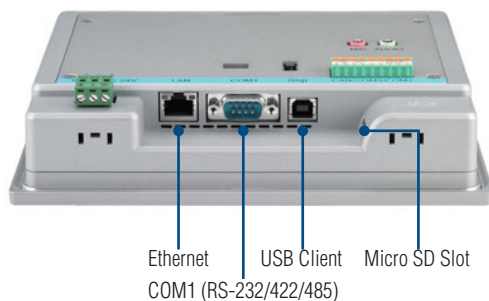
Ethernet  
USB Client  
Micro SD Slot  
COM1 (RS-232/422/485)

## Rear View

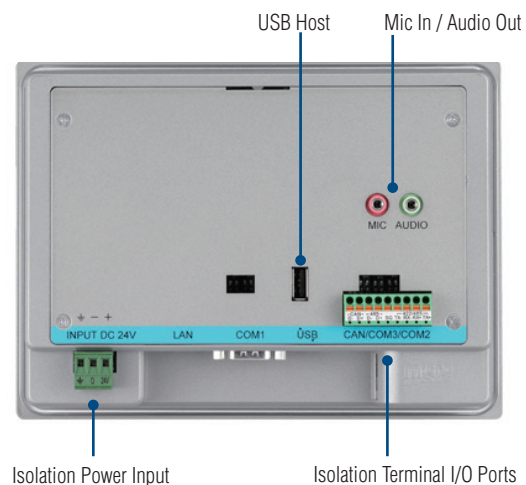

Isolation Power Input

Isolation Terminal I/O Ports



CAN/COM3/COM2

Isolation Terminal I/O Ports



FRANCE

+33 2 51 09 26 60  
sales@sphinxfrance.fr

SPAIN

+34 2 933 396 542  
comercial@s-connect.es