

# QORE: LEC-3010

DIN-Rail embedded computer built around the Intel Atom N450 with 6 x RS232/422/485 serial ports and 4 x GbE LAN



## Features

- 6 x RS232/422/485 serial ports
- Onboard Intel Atom N450 1.6GHz
- Intel ICH8M platform control hub
- DIN-Rail form factor
- Front facing LEDs for easy maintenance
- 4 10/100/1000 Mbps LAN
- CompactFlash Type I/II
- Cable free interior
- 8 Lines of programable DIDO

6 COM

4 LAN

USB

DIDO

Fanless


Cable-free

## EMBEDDED SYSTEM WITH

### Advanced Connectivity Features

The LEC-3010 is designed for high surge ESD automation environments, such as substations, generation SCADA applications and building automation. Featuring a fanless DIN-Rail design, the LEC-3010 easily integrates into any factory IA deployment scenario.

With six serial communication ports, 4 GbE LAN, 2 USB and DIDO, the LEC-3010 has a rich IO array. There is also a CompactFlash socket for storage.




FEATURE	DESCRIPTION	LEC-3010
<b>Platform</b>	Form Factor	DIN-Rail
	Processor	Intel N450
	Chipset	Intel ICH8M
	BIOS	AMI Flash BIOS
<b>Memory</b>	Memory IC On Board	No
	Memory Socket	SODIMM x 1 (up to 2GB per slot)
	Max Memory	2GB (1 x 2GB Module)
<b>Storage</b>	Compact Flash	1 x CF Socket Type I/II (internal/external options available)
<b>Networking</b>	Controller (Interface)	4 x Realtek RTL8111D
	COM Ports	6 x RS-232/422/485 Hardware auto-flow control
<b>I/O</b>	USB 2.0	2 (w/ 2 additional 2.54 pin headers)
	VGA	1
	LAN	4 x RJ45 GbE
	DIDO	4 x DI, 4 x DO
	Internal CF	1
	<b>Hardware Monitor</b>	Controller
Watchdog timer		Yes (1~255 level)
<b>OS Supported</b>		Embedded Windows XP/Linux kernel 2.4.16 or above/WindowsXP 32 bit
<b>Environmental Parameters</b>	Operating Temperature (With Industrial Components: CF, Memory, SSD, HDD)	-20°~55°C / 14°~131°F
	Operating Temperature (With Commercial Components)	-5°C~45°C / 23°~113°F
	Extended Operating Temperature Tested	N/A
<b>Dimensions</b>	W x H x D (mm)	60 x 170 x 126 mm
	Weight	1.4Kg
<b>Power</b>	DC Power	+12V ~ 36V DC in
<b>Compliance</b>	Standard	CE, FCC, RoHS

## ORDERING INFORMATION

LEC-3010 Intel N450, 6 x COM, 2 x USB, 4 x GbE, DIO

## MECHANICAL DRAWING

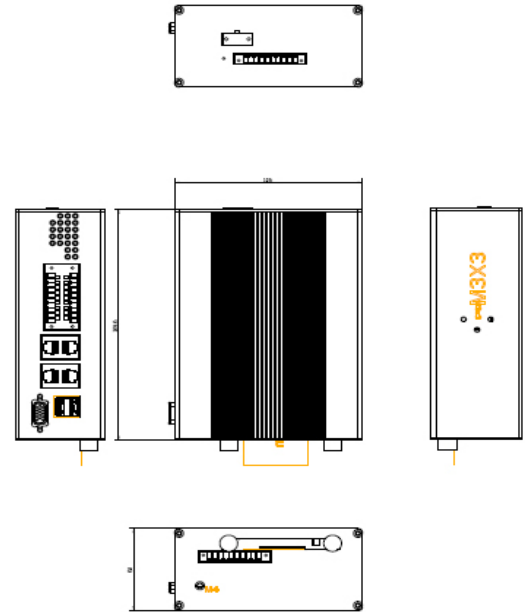

## About Lanner

Founded in 1986 and publicly listed (TAIEX 6245) since 2003, Lanner Electronics Inc. is an ISO 9001 certified designer and manufacturer of reliable, frontline network security, network video and applied computing platforms. With headquarters in Taipei, Taiwan and branches in the U.S. and China, Lanner is uniquely positioned to deliver custom technical solutions with localized, value-added service.

## Contact information

Lanner Electronics Inc  
7F, 173, Section 2 Datong Road  
Sijhih City, Taipei County 221, Taiwan

**T** +886 2 86926060  
**F** +886 2 86926101  
**E** sales@lannerinc.com  
**W** www.lannerinc.com



Specifications subject to change without notice.  
All brand names and trademarks are the registered properties of their respective owners.  
Copyright 2010 Lanner Electronics Inc.

**Lanner**  
creating value in applied computing